



40+ CHANNEL UHF TRANSCEIVER

IC-400PRO

Fully featured with Class Leading Performance



128 Channel Capability

The IC-400PRO comes pre-programmed with the 40 UHF CB simplex and repeater channels plus up to 88 additional channels are available for monitoring frequencies in 450MHz to 500MHz band. Channel data entry is available through the front panel, or via optional PC programming kit.

Commercial Specification

Designed for the most extreme Australian conditions. Die-cast aluminium chassis and heavy-duty heat sink, impact resistant polycarbonate front panel incorporating 4W speaker for crisp clear audio, even in high noise environments. Industrial grade condenser microphone is supplied.

Super sensitive private channels

The IC-400PRO is also compatible and fully approved for use on Licensed Land Mobile Services at 25W within the 450-500MHz band* at 12.5 or 25kHz when re-configured by an Authorised Icom Radio Dealer.

* ACA Licensed Users only.

Unique Repeater Scan

Our unique repeater scan function finds available repeater stations even while you are traveling. In addition, Group/Priority scan detects tagged channels, while also monitoring your priority channel.

Silent Stand-By

Listen only to your own group ! Up to 51 user selectable CTCSS group codes are available for silent stand-by operation. DTCSS is also available in private channels.

SelCall (Selective Calling)

Hear only the calls intended for you and see who called with SelCall ! The IC-400PRO comes with all popular CB and commercial 5-Tone Sel-call formats, along with user selectable ID number set up. The last 10 caller ID's are stored for easy recall and up to 28 numbers can be pre-programmed with name tags for easy reference.

Easy to use and install

- Smart Ring and Automatic Transponder acknowledges if other Icom's CB transceivers receive your call or are within range.
- Touch pad controls and rotary volume dial
- Backlit LCD with 8 character alpha display and status icons
- Compact and light with front facing speaker and quality mounting kit for roof or console mounting
- Optional DIN size kit, for in-dash installation



MADE IN JAPAN

2 Year Icom Australia Warranty

Icom Inc.

SPECIFICATIONS

GENERAL

- Frequency coverage :
 - CB channel 476.425–477.400MHz
 - Private channel 450–500MHz
- Number of channels :
 - CB channel 40 channels (Bank 1)
 - Private channel 88 channels (Bank 2–8)
- Channel spacing :
 - CB channel 25kHz
 - Private channel 12.5/25kHz
- Frequency stability : ±2.5ppm
- Operating temp. range : -10°C to +60°C
- Power supply voltage : 13.8V DC
- Current drain (approx.):
 - Tx CB (5W) 4.0A
 - Private (25W) 7.0A
 - Rx Max. audio 1200mA
 - Stand-by 300mA
- Antenna impedance : 50Ω (SO-239)
- Weight : 800g

TRANSMITTER

- Output power (at 13.8V DC) :
 - CB channel 5W, 1W (selectable)
 - Private channel 25W, 5W, 1W (selectable)
- Max. freq. deviation : ±5.0/2.5kHz (wide/nar)
- Spurious emissions : -30dBm
- Adjacent Ch. power : -22/-16dBm (wide/nar)
- FM Hum and Noise : 46/40dB typ. (wide/nar)
- Mic. impedance : 600Ω (8-pin modular)

RECEIVER

- Sensitivity : 0.25μV typ. (at 12dB SINAD)
- Squelch sensitivity : 0.25μV typ. (threshold)
- Adjacent channel selectivity :
 - 73/65dB (wide/nar)
- Spurious response : 75dB
- Intermodulation : 70dB
- Hum and Noise : 45/40dB typ. (wide/nar)
- Audio output power : 4W typ. at 10% distortion with a 4Ω load
- Ext. SP connector : 2-conductor 3.5 (d) mm (1/8")/4Ω


Applicable U.S. Military Specifications

Icom makes rugged products that meet MIL-STD requirements and strict environmental standards as follows.

Standard	MIL 810 C		MIL 810 D		MIL 810 E		MIL 810 F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
Low Pressure	500.1	I	500.2	I, II	500.3	I, II	500.4	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4-3	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation	505.1	I	505.2	I	505.3	I	505.4	I
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, II
Dust	510.1	I	510.2	I	510.3	I	510.4	I
Vibration	514.2	VIII, X	514.3	I	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV



DIMENSIONS

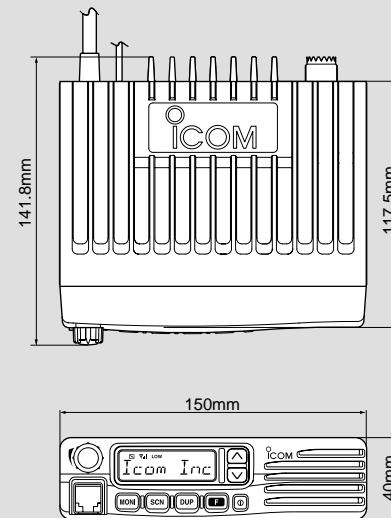


Measurements made in accordance with AS4295-1995 and AS/NZS4365-1996. All stated specifications are subject to change without notice or obligation. Appropriate Licence Required for 25W expansion.


OPTIONS

- **CS-400PRO** CLONING SOFTWARE (Ver. 10) + **OPC-1122** CLONING CABLE
- **HM-100TN** DTMF MICROPHONE
- **OPC-617** ACC CABLE
For external terminal connection.
- **SM-25** DESKTOP MICROPHONE
- **SP-22** EXTERNAL SPEAKER
Input impedance: 4Ω; Max. input power: 5W
- **UT-108** DTMF DECODER UNIT
Provides DTMF decode and ANI capabilities.
- **UT-109** VOICE SCRAMBLER UNIT (Ver. 02)
Up to 32 non-rolling scrambling codes available.
- **UT-110** VOICE SCRAMBLER UNIT (Ver. 02)
Up to 1020 (255 codes × 4 groups) rolling scrambling codes are available.

SUPPLIED ACCESSORIES

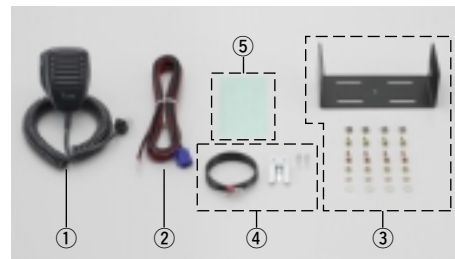

- ① Hand microphone (HM-100N)
- ② DC power cable
- ③ Mounting bracket kit
- ④ Microphone hanger kit
- ⑤ Key assign sticker



Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone: (425) 454-7619

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: (604) 952-4266 Fax: (604) 952-0099
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: 09 274 4062 Fax: 09 274 4708
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, 1, Rue Brindejonc des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone: (33) 5 61 36 03 03 Fax: (33) 5 61 36 03 00
URL : <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road,
Beijing, China
Phone: (010) 6866 6337 Fax: (010) 6866 3553
URL : <http://www.bjicom.com>



Certificate Number Q14190

Icom Inc. (Japan), is an ISO9001 certification acquired company.

Your local distributor/dealer: